



EFT-220 (BI)

双色温棒灯 Bi-Color LED Tube

EFT-220 (RGB)

全彩棒灯 RGB LED Tube

快速使用指南
QUICK GUIDES



EFT-220 (RGB)



EFT-220 (BI)



上海金贝摄影器材实业有限公司

Shanghai JINBEI Photographic Equipments Co., LTD.

上海市长宁区定西路788号7楼H座 邮编: 200052


7H Block, No.788 DingXi Road, 200052 Shanghai, P.R.China

Tel: +86-21-61169322


Fax: +86-21-61169286

goldenshell@goldenshell.com.cn


www.goldenshell.com.cn

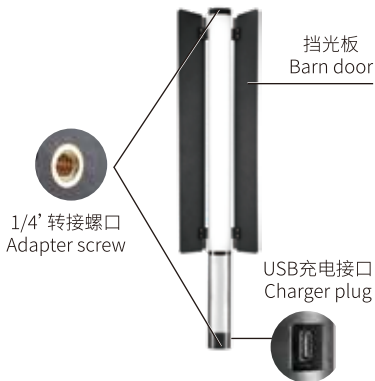

显示界面 LED Display



EFT-220BI



EFT-220RGB



模式切换按键
Mode button



电源开关按键
Power switch



“+”“-”按键
Button



亮度调节图标
Brightness adjustment icon



色温调节图标
Color temperature
adjustment icon



预设光效调节图标
Light effect adjustment icon



蓝牙图标 (仅Only EFT-220RGB)
Bluetooth icon



RGB全彩模式图标 (仅Only EFT-220RGB)
RGB mode icon



电量显示图标
Battery display icon



数值显示图标
Numerical display icon

基本操作 Basic operation

1) 开机/关机 On/Off——长按电源开关约2s开机或关机。

Press & hold the power switch for 2s to turn on or off.

2) 短按模式切换按键, 依次切换亮度/色温/预设光效模式(EFT-220RGB: 蓝牙/亮度/色相/色温/预设光效), 切换到相应功能后, 图标点亮。

Short press the mode switch button to switch the brightness/color temperature/preset light effect mode (Bluetooth/the brightness/HUE/color temperature/preset light effect mode) in turn. After switching to the corresponding function, the icon will light up.

3) 短按模式切换按键, 切换至亮度调节模式, 按“+/-”键调节亮度: 0~100%。

数值显示: “00~10”(EFT-220BI)/“000~100”(EFT-220RGB)

Short press the mode switch button to switch to the brightness adjustment mode, and press the “+/-” button to adjust the brightness: 0~100%.

the numerical value displays: “00~10”(EFT-220BI)/“000~100”(EFT-220RGB)

4) 短按模式切换按键, 切换至色温调节模式, 按“+/-”键调节色温: 2700K~7500K。

数值显示: “27~75”(EFT-220BI) / “270~750”(EFT-220RGB)。

Short press the mode switch button to switch to the color temperature adjustment mode, and press the "+/-" button to adjust the color temperature: 2700K~7500K.

The numerical value displays: “27~75”(EFT-220BI) / “270~750”(EFT-220RGB).

5) 短按模式切换按键, 切换至预设光效模式, 按“+/-”键调节预设光效:

“00~09”(EFT-220BI) / “000~020”(EFT-220RGB)。

Short press the mode switch button to switch to the preset light effect mode. Press the "+/-" button to adjust the preset light effect: “00~09”(EFT-220BI) / “000~020”(EFT-220RGB).

EFT-220BI内置10种预设光效 Built-in 10 preset lighting effects

恒亮度输出(Constant brightness) / 火焰(Fire) / 呼吸(Pulse) / 电视(TV) / 坏灯泡(Fault bulb) / 狗仔队(Paparazzi) / 远近光灯(Headlight) / 雷电(Storm) / 紧急求救(SOS) / 警示灯(Warning)

EFT-220RGB内置21种预设光效 Built-in 21 preset lighting effects

恒亮度输出(Constant brightness) / 火焰(Fire) / 呼吸(Pulse) / 电视(TV) / 坏灯泡(Fault bulb) / 远近光灯(Headlight) / 雷电(Storm) / 狗仔队(Paparazzi) / 紧急求救(SOS) / 警示灯(Warning) / 警灯(Police) / 消防车(Fire engine) / 救护车(Ambulance) / 烟花(Fire work) / 派对“快”(Party “Fast”) / 派对“慢”(Party “Slow”) / “R”红色频闪(Red multi) / “G”绿色频闪(Green multi) / “B”蓝色频闪(Blue multi) / “RGB”彩色频闪(Warning) / 色温循环(Color temperature cycle)

6) 短按模式切换按键, 切换至RGB全彩模式(仅EFT-220RGB), 按“+/-”键调节彩光。

数值显示: 000~359

Short press the mode switch button to switch to RGB mode(only EFT-220RGB), and press the "+/-" button to adjust the RGB color light.

The numerical value displays: 000~395

7) 短按模式切换按键, 切换至蓝牙模式(仅EFT-220RGB), 按“+/-”键打开“ON”或关闭“OFF”蓝牙功能。

蓝牙重置: 打开蓝牙功能, 连续按三次“+”键, 显示由“ON”转为“SET”, 重置完毕显示“ON”。

Short press the mode switch button to switch to bluetooth mode(only EFT-220RGB), and press the "+/-" button to on or off.

Bluetooth reset: turn on the Bluetooth and press the "+" key three times to change the display from "ON" to "SET", and display "ON" after resetting.

选配附件 Recommended accessories



MK-9球型云台
Ball head
3.09.011303



M11-05转接支架
Head adapter
3.09.011112



双灯头支架
2-head stand
3.09.011105



L-20相机镜头支架
Camera flash stand
3.09.011109



L-600F两用灯架
Background stand
1.09.011301



EQ-190摄影灯架
Background stand
1.09.031501-1



支持充电宝边充电边使用
Support charging while
using the charging bank

规格参数 Parameters

型号 Type	EFT-220BI	EFT-220RGB
编码 Code	1.05.031615	1.05.031617
输入功率 Input Power / 输出功率 Output Power	16W / 14W	
光源 Light source	144颗LED(EFT-220BI) / 144颗LED+72颗RGB LED(EFT-220RGB)	
光照度 Luminous Lux (0.5m)	EFT-220BI: 2700K>1500Lux/5500K>1700Lux/7500K>1750Lux EFT-220RGB: 2700K>1500Lux/5500K>1700Lux/7500K>1750Lux	
调光范围 Output range	0~100% / 数值显示 Digital display: 0.0~10(EFT-220BI) / 000~100(EFT-220RGB)	
色温 Color temperature	2700K~7500K	
显色指数 CRI / TlCI	Ra>96 / TlCI>98	

预设光效 Preset lighting effects

EFT-220BI内置10种预设光效 Built-in 10 preset lighting effects

恒照度输出(Constant brightness)/火焰(Fire)/呼吸(Pulse)/电视(TV)/坏灯泡(Fault bulb)/狗仔队(Paparazzi)
远近光灯(Headlight)/雷电(Storm)/紧急求救(SOS)/ 警示灯(Warning)

EFT-220RGB内置21种预设光效 Built-in 21 preset lighting effects

恒照度输出(Constant brightness) / 火焰(Fire) / 呼吸(Pulse) / 电视(TV) / 坏灯泡(Fault bulb)
远近光灯(Headlight) / 雷电(Storm) / 狗仔队(Paparazzi) / 紧急求救(SOS) / 警示灯(Warning)
警灯(Police) / 消防车(Fire engine) / 救护车(Ambulance) / 烟花(Fire work) / 派对“快”(Party“Fast”)
派对“慢”(Party“Slow”) / “R”红色频闪(Red multi) / “G”绿色频闪(Green multi) “B”蓝色频闪(Blue multi)
“RGB”彩色频闪(Warning) / 色温循环(Color temperature cycle)

RGB全彩模式 RGB mode (仅Only EFT-220RGB)

0~359

无线遥控 Wireless remote control (仅Only EFT-220RGB)

内置蓝牙模块 Built-in bluetooth

供电模式 Power supply modes:

内置18650 7.4V 3000mAh锂电池供电 18650 7.4V 3000mAh lithium batteries for power supply
充电接口 Charging interface: USB Type-C(5V DC 2A) / 充电时间 Charging time: 约2小时 About 2 hours
全光续航时间(5500K)>80分钟 Endurance time(5500K) > 80 minutes

扩展 Extend

1/4' 通用螺口 Adapter screw x 2

尺寸 Dimensions(mm)

EFT-220BI: 575(L) x 40(W) x 33(H) / EFT-220RGB: 587(L) x 40(W) x 33(H)


重量 Weight

560g(不含挡板 Without barn door)

金贝产品不断开发更新, 如有功能、技术参数变化, 恕不另行通知。

We reserve the right to update functions or parameters without further notice.

装箱清单 Package contents



EFT-220棒灯
Led tube



Type-C数据线 x 1
Type-C data line



快速使用指南
Quick guides



挡板
Barn door



EFT-220便携保护袋
Portable package